

LCD 900P

Polarized LCD chart




LCD spec :


- 22 inches Led LCD full HD
- Thickness : 5 cm.
- Power supply : from 100V to 240 V AC (50-60 Hz)
- Consumption 40 W
- Remote control by infrared
- Possibility to update by USB
- Distance from 2.0 to 7.0 meters
- Language english and others
- CE certificate: 93/42 EN60601-1 EN60601-2 EN60601-3
- Possibility to connect LCD to a network
- Possibility to send to a printer (example as pdf) the report of exam
- Possibility to use the DR900 controller as remote control




SLOAN
SNELLEN
CYRILLIC



STANDARD
DIGITAL






STANDARD
ALLEN






LANDOLDT




SNELLEN




With possibility to move the cross and indication of prismatic value



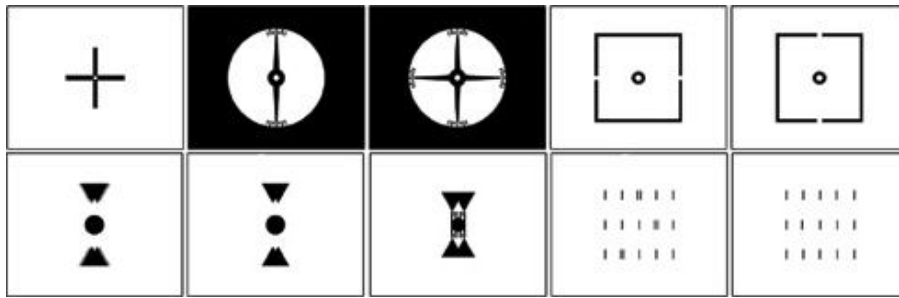

MKH test



Mask : red/green

Possibility to show : 3 lines with different visus (example 0,5 - 0,6 - 0,7)

Singol horizontal line

Singol vertical line (different visus)

Singol letter

Contrast change in 4 steps

Scale : decimal - logmar - 6/6 - 20/20 (changeble in setting)

Keep the same value when shift from test to test

If going in standby, return at last test used when on again

Change random (with every chart or mask)

ETDRS

Confusion test at singol letter and with lines

Test Bailey Lovie

Sequenza di Haase

Button on remote to switch off the light screen

Button on remote control to start sequence on USB key (video or pictures)

Ishihara test 38 tables

In setting possibility Adjust red and green (filter and test)

Adjust distance (step 10 cm.)

Set mirror

Optional accessory: Software and external light for driver licence sequence

Possibility to send to a printer via pc (pdf file) the report